


# ANTI-BACKLASH LEAD SCREW NUTS

COMMERCIAL QUALITY

**THREADS**  
1/4-20 to 5/8-10

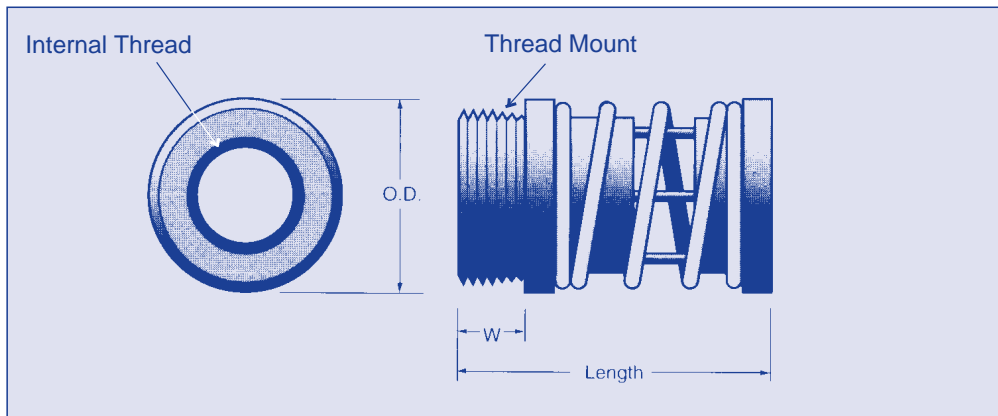

**Material:** Turcite® X Engineered Thermoplastic

**ORDER BY CATALOG NUMBER**

Order MAH-B1 series flanges and MAS-A1 series lead screws (.003 Lead Accuracy) separately.

Cat. No.	Internal Threads	Starts	Lead	Thread Type	O.D.	Min to Max Length	Thread Mount	W	Preload Min. Lbs	Preload Max. Lbs	
MAH-A2-0	3/16-20	1	.050	Acme	3/4	1.09 to 1.34	5/8-18	1/4	1.0	4.0	
MAH-A2-1	1/4-20	1	.050	Acme					.30	6.0	
MAH-A2-2	1/4-16	1	.063	Acme					.38	6.0	
MAH-A2-3	5/16-12	2	.167	Acme	3/4	1.09 to 1.34	5/8-18	1/4	.50	6.0	
MAH-A2-4	5/16-8	2	.250	stub Acme					.75		
MAH-A2-5	5/16-8	4	.500	stub Acme		1.47 to 2.00			.35	7.4	
MAH-A2-6	3/8-20	1	.050	Acme	3/4	1.09 to 1.34	5/8-18	1/4	.30	6.0	
MAH-A2-7	3/8-16	1	.063	Acme					.38		
MAH-A2-8	3/8-12	1	.083	Acme					.50		
MAH-A2-9	3/8-10	1	.100	Acme					.60		
MAH-A2-10	3/8-8	1	.125	stub Acme					.75		
MAH-A2-11	3/8-12	2	.167	stub Acme					.50		6.0
MAH-A2-12	3/8-10	2	.200	stub Acme					.60		
MAH-A2-13	3/8-8	2	.250	stub Acme	.75						
MAH-A2-14	3/8-8	3	.375	stub Acme	3/4	1.47 to 2.00	5/8-18	1/4	.35	7.4	
MAH-A2-15	3/8-8	4	.500	stub Acme					.35		
MAH-A2-16	3/8-5	5	1.000	stub Acme					.35		
MAH-A2-17	3/8-4	5	1.200	stub Acme					.64		
MAH-A2-18	7/16-8	2	.250	stub Acme					.790		1.55 to 2.00
MAH-A2-19	7/16-8	4	.500	stub Acme	.19						
MAH-A2-20	1/2-12	1	.083	Acme	1"	1.43 to 2.06	15/16-16	3/8	.48	11.1	
MAH-A2-21	1/2-10	1	.100	Acme					.48		
MAH-A2-22	1/2-10	2	.200	stub Acme					.90		
MAH-A2-23	1/2-4	2	.500	Ball					.48		
MAH-A2-24	5/8-10	1	.100	Acme	1"	1.43 to 2.06	15/16-16	3/8	.48	11.1	
MAH-A2-25	5/8-8	1	.125	stub Acme					.48		
MAH-A2-26	5/8-5	1	.200	Acme					.90		
MAH-A2-27	5/8-10	1	.200	Acme					.90		
MAH-A2-27	5/8-10	2	.200	stub Acme					.90		

Other sizes available upon request. See mount section for flanges.

Turcite® is a registered trademark of W. S. Shamban Company.

**5M** (800) 243-0986  
In CT (203) 775-4877

**NORDEX**