


PLAIN STYLE LEAD SCREW NUT

COMMERCIAL QUALITY

THREADS
1/4-20 TO 5/8-10

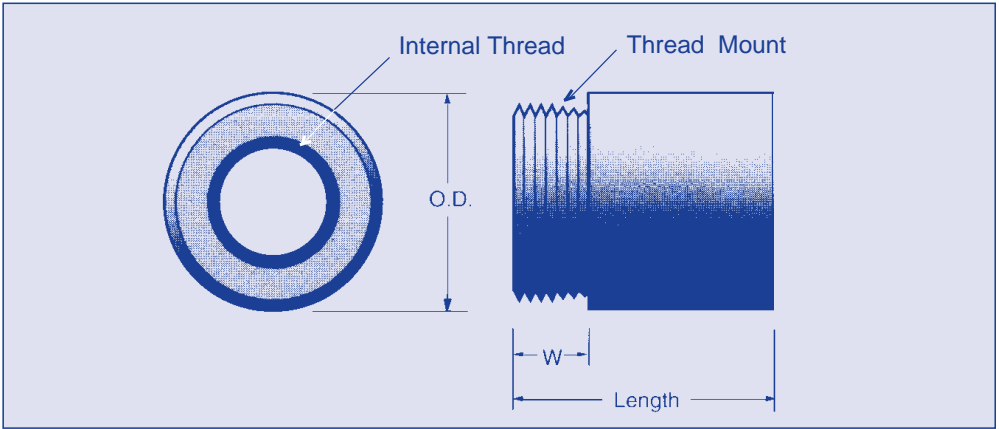

Material: Turcite® X Engineered Thermoplastic

ORDER BY CATALOG NUMBER

Order MAH-B1 series Flanges and MAS-A1 series Lead Screws (.003 lead accuracy) separately.

Cat. No.	Internal Threads	Starts	lead	Thread Type	O.D.	Length	Thread Mount	W	Dynamic Capacity	Static Capacity				
MAH-A1-0	3/16-20	1	.050	Acme	3/4	3/4	5/8-18	.250	30	150				
MAH-A1-1	1/4-20	1	.050	Acme	3/4	3/4	5/8-18	1/4	24	210				
MAH-A1-2	1/4-16	1	.063	Acme					24	205				
MAH-A1-3	5/16-12	2	.167	Acme	3/4	3/4	5/8-18	1/4	36	380				
MAH-A1-4	5/16-8	2	.250	stub Acme					22	231				
MAH-A1-5	5/16-8	4	.500	stub Acme						22	231			
MAH-A1-6	3/8-20	1	.050	Acme	3/4	3/4	5/8-18	1/4	36	490				
MAH-A1-7	3/8-16	1	.063	Acme					36	482				
MAH-A1-8	3/8-12	1	.083	Acme					36	466				
MAH-A1-9	3/8-10	1	.100	Acme					36	455				
MAH-A1-10	3/8-8	1	.125	stub Acme					22	284				
MAH-A1-11	3/8-12	2	.167	stub Acme					3/4	3/4	5/8-18	1/4	22	294
MAH-A1-12	3/8-10	2	.200	stub Acme									22	290
MAH-A1-13	3/8-8	2	.250	stub Acme									22	284
MAH-A1-14	3/8-8	3	.375	stub Acme					3/4	3/4	5/8-18	1/4	22	284
MAH-A1-15	3/8-8	4	.500	stub Acme									22	284
MAH-A1-16	3/8-5	5	1.000	stub Acme	22	264								
MAH-A1-17	3/8-4	5	1.200	stub Acme	22	262								
MAH-A1-18	7/16-8	2	.250	stub Acme	.790	1"	5/18-18	1/4					29	448
MAH-A1-19	7/16-8	4	.500	stub Acme					29	448				
MAH-A1-20	1/2-12	1	.083	Acme	1"	1"	15/16-16	3/8	48	858				
MAH-A1-21	1/2-10	1	.100	Acme					48	839				
MAH-A1-22	1/2-10	2	.200	stub Acme					29	526				
MAH-A1-23	1/2-4	2	.500	Ball					29	476				
MAH-A1-24	5/8-10	1	.100	Acme	1"	1"	15/16-16	3/8	48	1073				
MAH-A1-25	5/8-8	1	.125	stub Acme					29	658				
MAH-A1-26	5/8-5	1	.200	Acme					48	979				
MAH-A1-27	5/8-10	2	.200	stub Acme					29	666				

Other sizes available upon request. See mount section for flanges.

Turcite® is a registered trademark of W.S. Shamban Company.

NORDEX

(800) 243-0986
In CT (203) 775-4877

4M